

Current Sensor

Product Series: STK-CTS/P5
Part number: STK-25CTS/P5
STK-32CTS/P5
STK-40CTS/P5
STK-50CTS/P5
Version: Ver1.8



Sinomags Technology Co., Ltd

Web site : www.sinomags.com

CONTENT

1.	Description	2
2.	Electrical data STK-25CTS/P5.....	3
3.	Electrical data STK-32CTS/P5.....	4
4.	Electrical data STK-40CTS/P5.....	5
5.	Electrical data STK-50CTS/P5.....	6
6.	Frequency band width	7
7.	Response time & noise with typical circuit	7
8.	Frequency delay performace	8
9.	STK-CTS/P5 Dimensions & Pins & Footprint.....	9

1. Description

The STK-CTS/P series current sensor is based on TMR (tunnel magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- ★ AC Variable speed drives
- ★ Inverter
- ★ Electric welder power supply
- ★ Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 105
Storage temperature	T_stg	°C	-40 ~ 105
Mass	m	g	10
Maximum traverse temperature	T_mt	°C	105

Remark 1: The product will not be damaged when used at 105 °C

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{CC}	V	6
ESD rating (HBM)	U _{ESD}	kV	4

Remark 2: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	4	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	6	
Clearance distance (pri. -sec)	d _{Cl}	mm	> 8	Space shortest distance
Creepage distance (pri. -sec)	d _{Cp}	mm	> 8	Shortest distance along the body
Shell material			V0 according to UL 94	

2. Electrical data STK-25CTS/P5

Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-25		25	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{A}$
Theoretical gain	G_{th}	mV/A		80		2 V @ I_{pn}
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2		2	@ $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note:

- Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.
- Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit}@25^{\circ}\text{C} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit}@25^{\circ}\text{C}$ is 25°C .

3. Electrical data STK-32CTS/P5

Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-32		32	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{A}$
Theoretical gain	G_{th}	mV/A		62.5		2 V @ I_{pn}
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2		2	@ $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note:

- Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^{\circ}\text{C}) - (G_{fit} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.
- Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit}@25^{\circ}\text{C} * I_n + V_{off} @ 25^{\circ}\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit}@25^{\circ}\text{C}$ is 25°C .

4. Electrical data STK-40CTS/P5

Condition: $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-40		40	$I_{pm} = 43\text{A}$ @ $V_{CC} = 4.9\text{V}$
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		50		$2\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@ 10% of I_{PN}
Step response time	t_{res}	μs		1		@ 90% of I_{PN}
Delay time	t_{delay}	μs		1		@ 400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2		2	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$

Note:

- Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^\circ\text{C}) - (G_{fit} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.
- Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit}@25^\circ\text{C} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit}@25^\circ\text{C}$ is 25°C .

5. Electrical data STK-50CTS/P5

Condition: $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-50		50	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		5	10	
Rated output voltage	V_{FS}	V		± 2		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{ A}$
Theoretical gain	G_{th}	mV/A		40		$2\text{ V} @ I_{pn}$
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@400 kHz
-3dB band width	BW	kHz		400		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2		2	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$

Note:

- Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^\circ\text{C}) - (G_{fit} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.
- Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit}@25^\circ\text{C} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit}@25^\circ\text{C}$ is 25°C .

6. Frequency band width

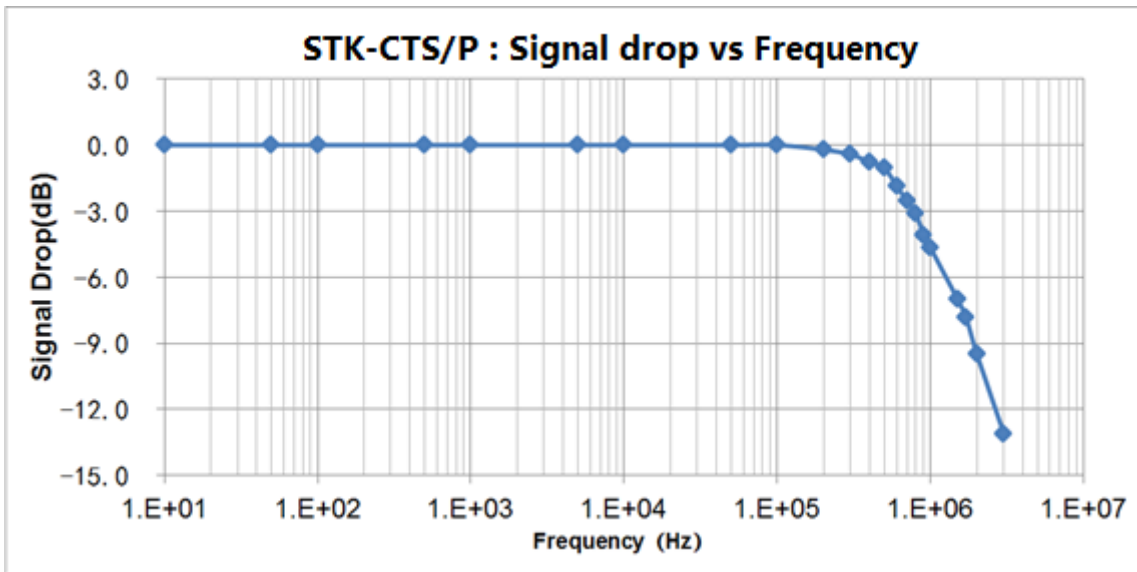


Fig.1 the band width of STK-CTS/P series current sensors. The bandwidth of the sensor is in the range of DC ~400 kHz (-3 dB).

7. Response time & noise with typical circuit

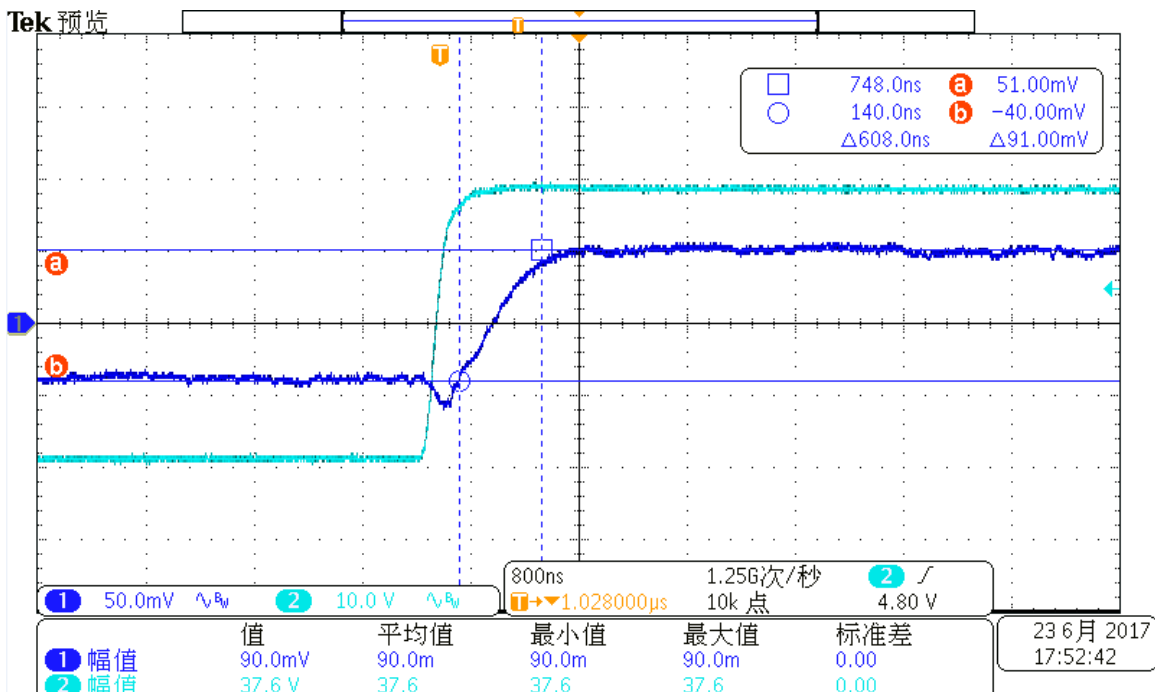


Fig.2 the step response time of STK-CTS/P current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The delay from 90% of the original current signal to 90% of the output of the sensor is less than 1µs.

8. Frequency delay performace






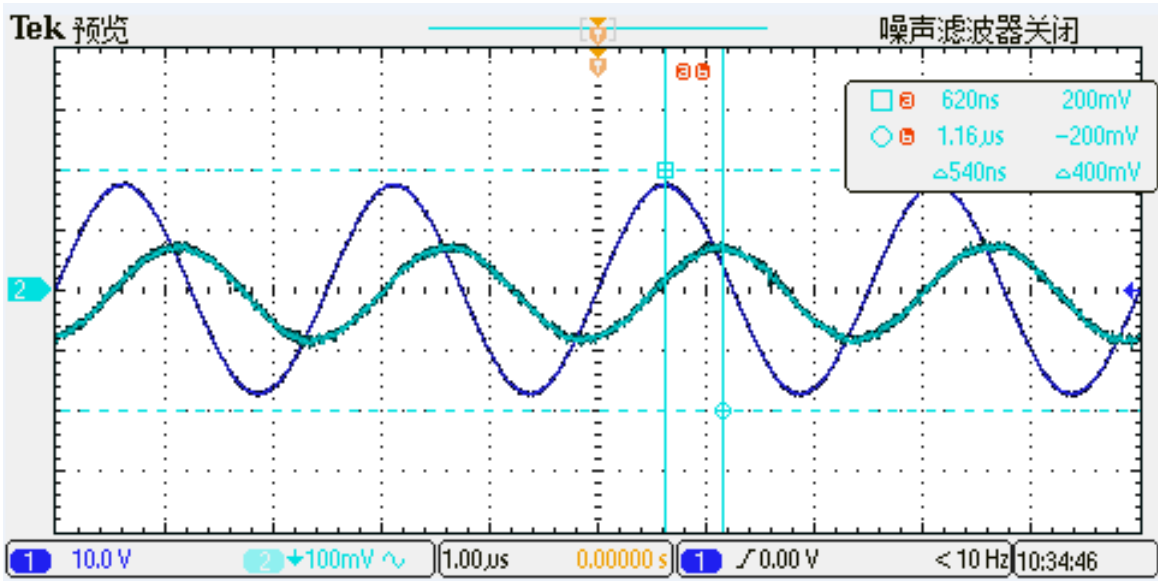


Fig.3 when detection the primary current with a frequency of 400 kHz. The typical results of the output of STK-CTS/P current sensor on the primary current delay characteristics. The delay time from primary current (light blue) to the output of the sensor (dark blue) is less than 1.16 μs.

9. STK-CTS/P5 Dimensions & Pins & Footprint

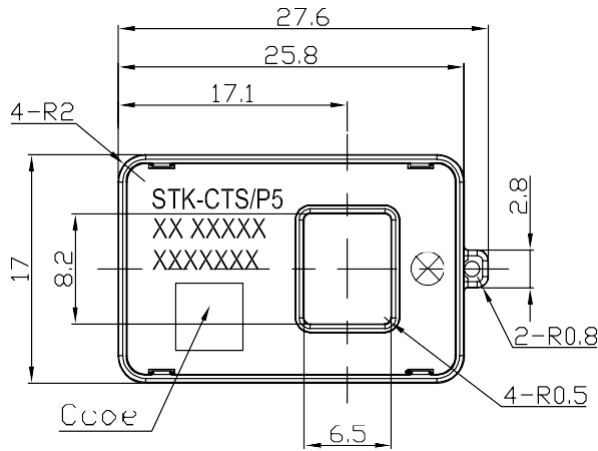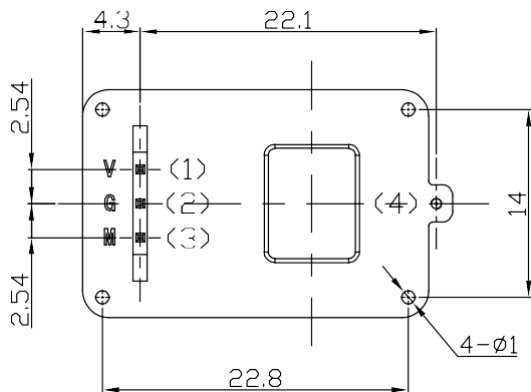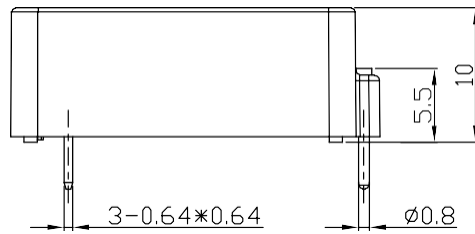


Connection

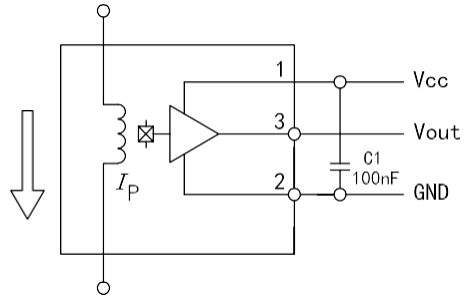


Terminals

(1)	Vcc
(2)	GND
(3)	Vout
(4)	NULL

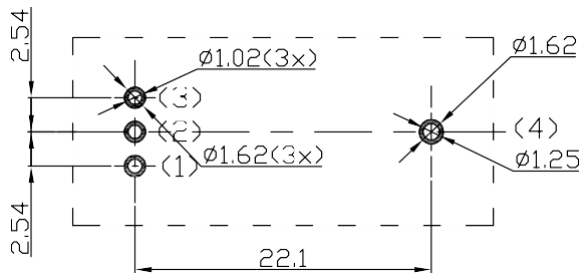

Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ±0.5
Unit :mm



变更记录:

编写	审核	版本	日期	修改记录
谢建勇		V1.1	2020-10-21	外壳尺寸变更
谢建勇		V1.2	2021-01-04	增加85度~105度精度
谢建勇		V1.3	2021-01-06	增加穿芯电流线温度规格
谢建勇	朱海华	V1.4	2021-01-18	增加50CTS/P5规格, 图片变为实物图
谢建勇	朱海华	V1.5	2021-03-26	增加40CTS/P5规格
谢建勇	朱海华	V1.6	2021-04-12	增加25CTS/P5规格
谢建勇	朱海华	V1.7	2021-07-2	删除I _{pn} 精度
谢建勇	朱海华	V1.8	2021-12-9	删除I _{pn} , 将I _{pm} 改为I _{pn}