




Current Sensor

Product Series: STK-CTS/A1
STK-25CTS/A1

Part number:

Version: Ver1.2

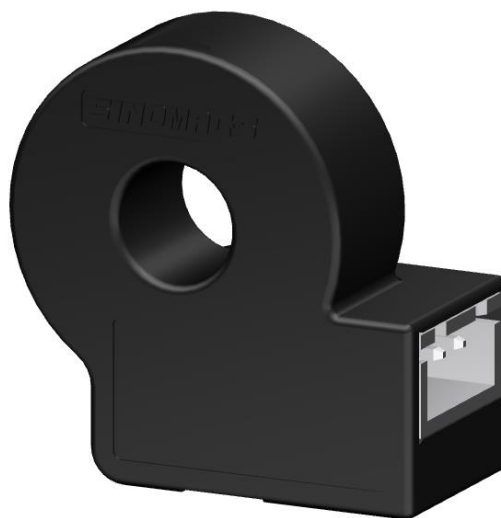

Sinomags Technology Co., Ltd

Web site : www.sinomags.com

CONTENT

1.	Description	2
2.	Electrical data STK-25CTS/A1.....	3
3.	Frequency band width	4
4.	Response time & noise with typical circuit	4
5.	Frequency delay performace	5
6.	STK-CTS/A1 Dimensions & Pins & Footprint.....	6

1. Description

The STK-CTS/A1 series current sensor is based on open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- ★ AC Variable speed drives
- ★ Electric welder power supply
- ★ Inverter
- ★ Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 105
Storage temperature	T_stg	°C	-40 ~ 105
Mass	m	g	7

Remark 1: The product will not be damaged when used at 105 °C

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{CC}	V	6
ESD rating (HBM)	U _{ESD}	kV	4

Remark 2: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	4	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	6	
Clearance distance (pri. -sec)	d _{Cl}	mm	> 8	Space shortest distance
Creepage distance (pri. -sec)	d _{Cp}	mm	> 8	Shortest distance along the body
Shell material			V0 according to UL 94	

2. Electrical data STK-25CTS/A1

Condition: $T_A = 25^\circ\text{C}$, $V_{cc} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A	-25		25	
Supply voltage	V_{cc}	V	4.75	5	5.25	
Current consumption	I_{cc}	mA		5	10	
Rated output voltage	V_{FS}	V		± 1.25		$(V_{out} @ \pm I_{pn}) - V_{off}$
Internal output resistance	R_{out}	Ω		1		@ V_{out}
Quiescent voltage	V_{off}	V	1.63	1.65	1.67	$V_{out} @ 0\text{A}$
Theoretical gain	G_{th}	mV/A		50		1.25 V @ I_{pn}
Non-linearity	Non-L	% I_{pn}		0.5		$\pm I_{pn}$
reaction time	t_{ra}	μs		0.5		@10% of I_{PN}
Step response time	t_{res}	μs		1.8		@90% of I_{PN}
Delay time	t_{delay}	μs		1		@180 kHz
-3dB band width	BW	kHz		180		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		15 25		
Accuracy @ RT	X	% of I_{pn}	-1		1	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-2.5		2.5	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$

Note:

- Accuracy @ RT, $X = ((V_{out} @ I_n @ 25^\circ\text{C}) - (G_{fit} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, Here I_n is the current test current. G_{fit} is the normal temperature fitting gain.
- Accuracy, $X_{TRange} = ((V_{out} @ I_n @ T_x) - (G_{fit}@25^\circ\text{C} * I_n + V_{off} @ 25^\circ\text{C})) / V_{FS}$, The fitting gain of the product at $G_{fit}@25^\circ\text{C}$ is 25°C .

3. Frequency band width

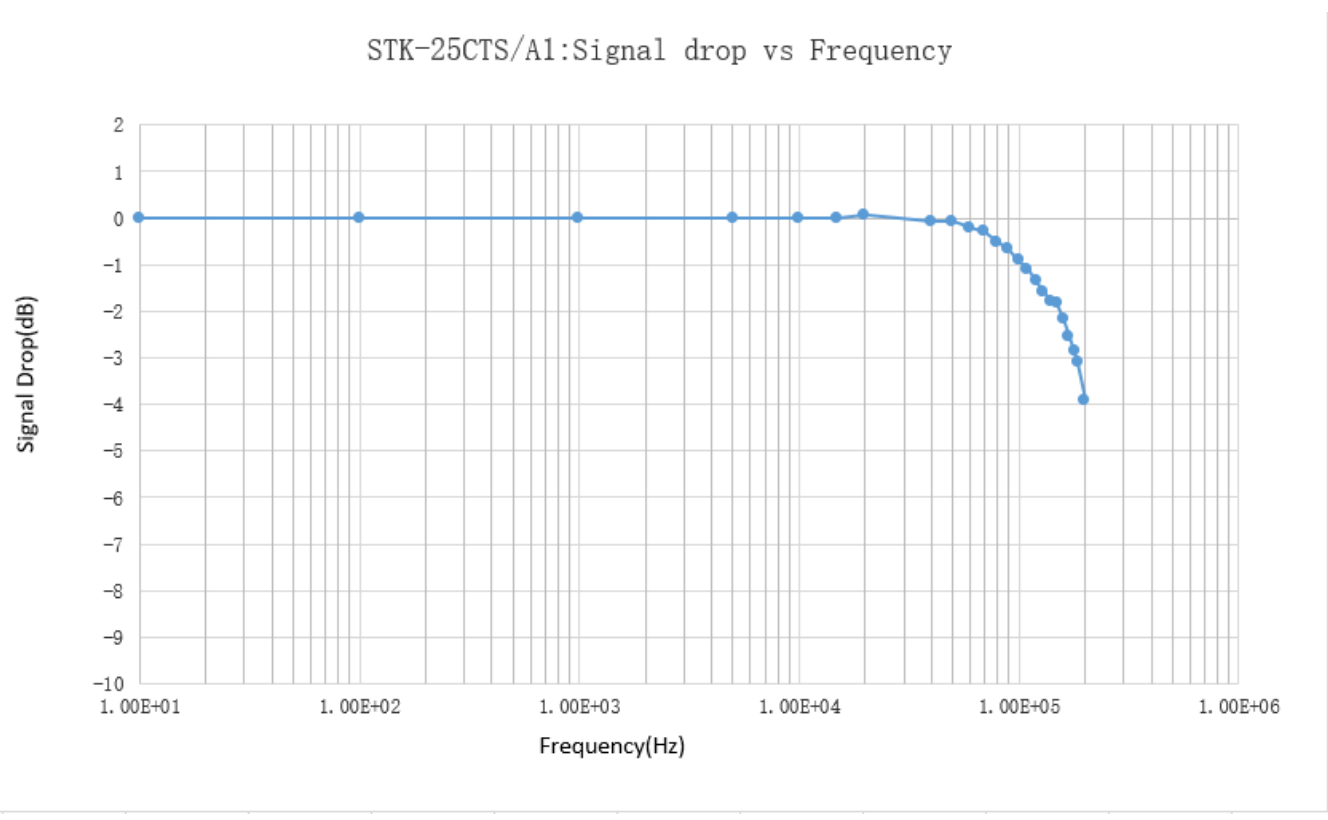


Fig.1 the band width of STK-CTS/A1 series current sensors.The bandwidth of the sensor is in the range of DC ~180 kHz (-3 dB).

4. Response time & noise with typical circuit

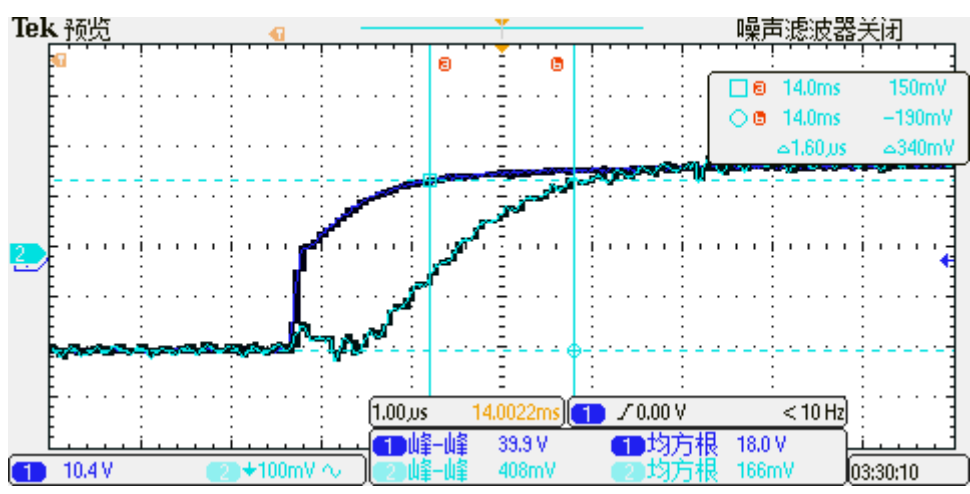


Fig.2 the step response time of STK-CTS/A1 current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The delay from 90% of the original current signal to 90% of the output of the sensor is less than 1.8us.

5. Frequency delay performance

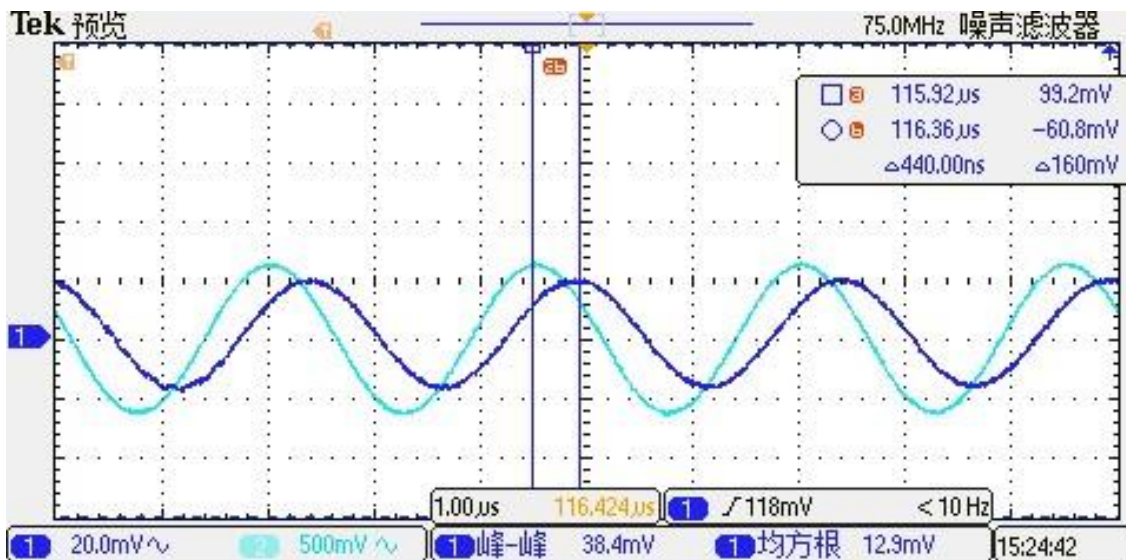


Fig.3 when detection the primary current with a frequency of 180 kHz. The typical results of the output of STK-CTS/A1 current sensor on the primary current delay characteristics. The delay time from primary current (light blue) to the output of the sensor (dark blue) is less than 1 μ s.

6. STK-CTS/A1 Dimensions & Pins & Footprint

