

CURRENT SENSOR

PRODUCT SERIES: STB-LF5
PRODUCT PART NUMBER: STB-500LF5
STB-500LF5-B
VERSION: Ver 1.3



Sinomags Technology Co., Ltd.

Web site: www.sinomags.com

CONTENT

1. Description	2
2. STB-500LF5 Electrical parameters	3
3. STB-500LF5-B Electrical parameters	4
4. STB-500LF5 Dimensions.....	5
5. STB-500LF5-B Dimensions:	6
6. Mechanical characteristics	7

1. Description

STB-LF5 series current sensors are based on close loop principle. The sensor can detect the current with DC, AC, pulse and irregular wave shape with current output.

Typical application

- Windmill inverters
- AC variable speed and servo motor drives
- Uninterruptible Power supplies (UPS)
- Power supplies for welding applications
- Test and measurement
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Static converts for DC motor drives

General parameters

Parameter	Symbol	Unit	Value
Sensor operating temperature	T_A	°C	STB-500LF5 :-40 ~ 85 STB-500LF5-B: -10 ~ 70
Storage temperature	T_S	°C	STB-500LF5 :-50 ~ 90 STB-500LF5-B: -25 ~ 85
Mass	m	g	240

Absolute parameters

Parameters	Symbol	Unit	Value
Supply voltage (-40°C...85°C)	V_{CCmax}	V	±25.2
Maximum primary conductor temperature	T_{Bmax}	°C	100
Maximum steady state primary current (-40°C...85°C)	I_{PNmax}	A	500

Ratings

Parameter	Unit	Value
Primary involved potential	V AC/DC	600
Maximum surrounding air temperature	°C	85
Primary current	A	0...500

Isolation parameters

Parameter	Symbol	Unit	Value	Remark
RMS voltage for AC test 50Hz/1 min	U_d	kV	STB-500LF5 :3.8 STB-500LF5-B:3	
Impulse withstand voltage 1.2/50μs	U_w	kV	STB-500LF5 :12.5 STB-500LF5-B:10.6	
Clearance distance (pri. -sec)	dCl	mm	STB-500LF5 :14.6 STB-500LF5-B:12.2	Shortest distance through air
Creepage distance (pri. -sec)	dCp	mm	STB-500LF5 :15.6 STB-500LF5-B:18	Shortest path along device body
Case material	-	-	V0	According to UL 94
Comparative tracking index	CTI		600	

2. STB-500LF5 Electrical parameters

Condition: $V_{CC} = \pm 14.25V \sim \pm 25.2V$, $T_A = 25^\circ C$, unless specified.


Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	I_{PN}	A			500	
Primary current measuring range	I_{PM}	A	-800		800	
Measuring resistance	R_M	Ω			70	@ $\pm 500A$ with $\pm 14.25V$
	R_M	Ω			18	@ $\pm 800A$ with $\pm 14.25V$
	R_M	Ω			95	@ $\pm 500A$ with $\pm 17.1V$
	R_M	Ω			35	@ $\pm 800A$ with $\pm 17.1V$
	R_M	Ω			155	@ $\pm 500A$ with $\pm 22.8V$
	R_M	Ω			70	@ $\pm 800A$ with $\pm 22.8V$
Secondary nominal RMS current	I_{SN}	A	-0.1		0.1	
Turns ratio	N_S	NT		5000		
Resistance of secondary winding	R_S	Ω			52.8	$T_A = 15^\circ C$
Supply voltage	V_{CC}	V	± 14.25		± 25.2	
Current consumption	I_{CC}	mA		$26 + I_S$ $39 + I_S$		$V_{CC} = \pm 15V$ $V_{CC} = \pm 25.2V$
Nominal sensitivity	S_N	mA/A		0.2		
Offset current, referred to primary	I_O	A	-1		1	
Offset current temperature drift, referred to primary	I_{OT}	A	-0.6		0.6	
Total error at I_{PN}	ε_{tot}	% of I_{PN}	-0.5		0.5	25...70...85 $^\circ C$
			-0.6		0.6	-40 $^\circ C$...85 $^\circ C$
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
RMS noise current referred to pri.	I_{no}	mA		90		1Hz to 20kHz
Reaction time @ 10% of I_{PN}	t_{ra}	μs			0.5	0 to 500A 200 A/us
Response time @ 90% of I_{PN}	t_r	μs			0.5	0 to 500A 200 A/us
Frequency bandwidth (-3dB)	BW	kHz		200		Small Signal bandwidth

3. STB-500LF5-B Electrical parameters






Condition: $V_{CC} = \pm 14.25V \sim \pm 25.2V$, $T_A = 25^\circ C$, unless specified.

Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	I_{PN}	A			500	
Primary current measuring range	I_{PM}	A	-800		800	
Measuring resistance	R_M	Ω	0		60	@ $\pm 500A$ with $\pm 15V$
	R_M	Ω	0		11	@ $\pm 800A$ with $\pm 15V$
	R_M	Ω	0		92	@ $\pm 500A$ with $\pm 18V$
	R_M	Ω	0		30	@ $\pm 800A$ with $\pm 18V$
	R_M	Ω	5		149	@ $\pm 500A$ with $\pm 24V$
	R_M	Ω	5		65	@ $\pm 800A$ with $\pm 24V$
Secondary nominal RMS current	I_{SN}	mA	-100		100	
Turns ratio	N_S	NT		5000		
Resistance of secondary winding	R_S	Ω			52.8	$T_A = 25^\circ C$
Supply voltage	V_{CC}	V	± 15		± 24	$\pm 5\%$
Current consumption	I_{CC}	mA		$26 + I_S$ $39 + I_S$		$V_{CC} = \pm 15V$ $V_{CC} = \pm 25.2V$
Nominal sensitivity	S_N	mA/A		0.2		
Offset current	I_O	mA	-0.4		0.4	$I_P = 0$ $T_A = 25^\circ C$
Offset current temperature drift	I_{OT}	A	-0.5	± 0.3	0.5	$-10^\circ C \dots 70^\circ C$
Total error at I_{PN}	ε_{tot}	% of I_{PN}	-0.6		0.6	$T_A = 25^\circ C$
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	
Reaction time	t_{ra}	μs			1	10% of I_{PN}
Response time	t_r	μs			1	90% of I_{PN}
di/dt accurately followed	d_i/d_t	A/us	100			
Frequency bandwidth (-3dB)	BW	kHz		200		Small Signal bandwidth


4. STB-500LF5 Dimensions

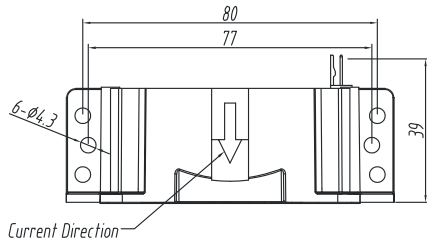


	d_a	d_{cp}
A-B	14.6mm	15.6mm

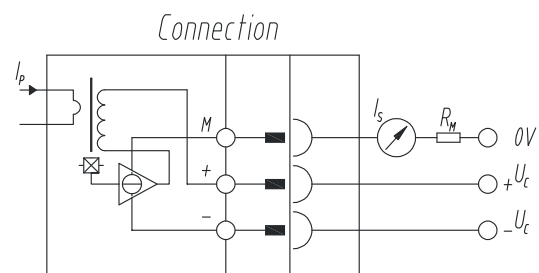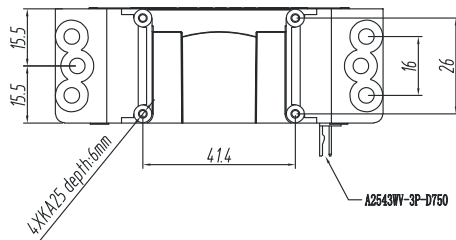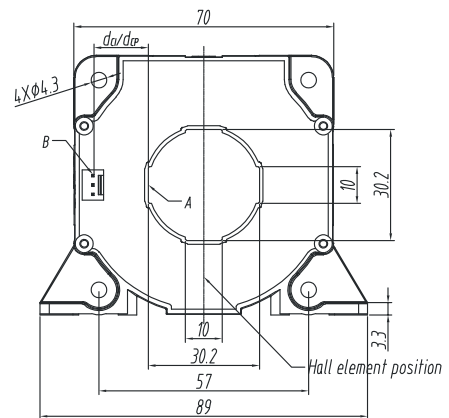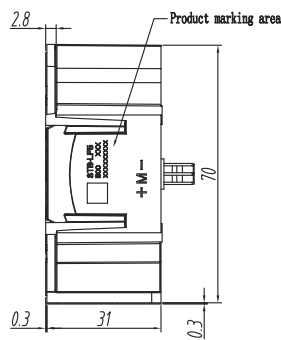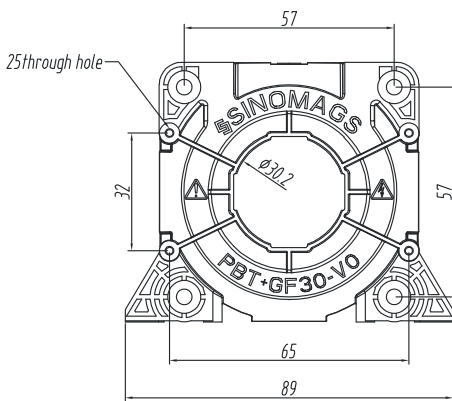






Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ± 0.5
Unit : mm




5 STB-500LF5-B Dimensions:

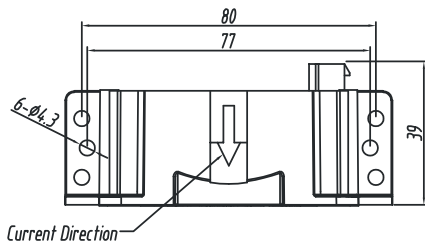

	d_a	d_p
A-B	8.5 mm	22.2 mm

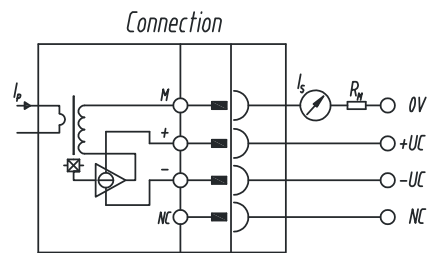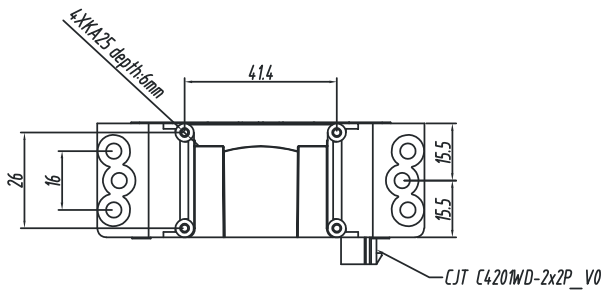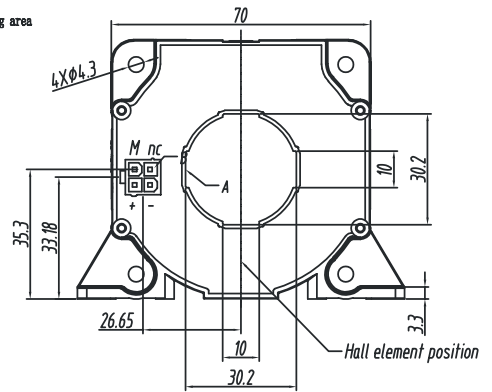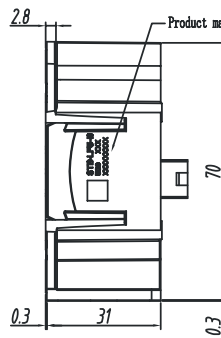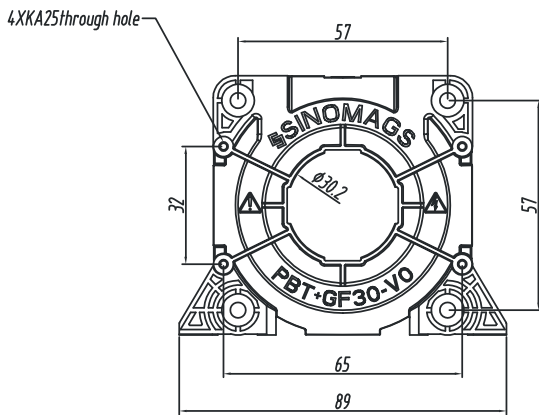

Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ± 0.5
Unit : mm



6 Mechanical characteristics

- General tolerance ± 0.5 mm
- Transducer fastening
 - Vertical position
 - 6 holes $\varnothing 4.3$ mm
 - 6 M4 steel screws
 - Recommended fastening torque 2.1 N·m($\pm 10\%$)
- Primary through-hole $\varnothing 30$ mm
 - Or 30mm \times 10mm
- Transducer fastening
 - Horizontal position
 - 4 holes $\varnothing 4.3$ mm
 - 4 M4 steel screws
- Connection of secondary
 - CJT A2543WV-3P-D750 (STB-500LF5)
 - CJT C4201WD-2x2P_V0 (STB-500LF5-B)