

CURRENT SENSOR

PRODUCT SERIES: STB-LA/ZNR

PRODUCT PART NUMBER: STB-250LA/ZNR

VERSION: Ver 1.0



Sinomags Technology Co., Ltd.

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Electrical parameters (STB-250LA/ZNR)	3
3.	Dimensions: STB-xxxLA/ZNR	5
4.	PCB footprint (STB-xxxLA/ZNR)	6

1. Description

STB-LA/ZNR series current sensors are based on close loop principle with TMR technology. The sensor can detect the current with DC, AC, pulse and irregular wave shape.

Typical application

- Solar inverter
- Direct-current dynamo
- Uninterruptible Power Supplies (UPS)
- Switched model power supplies (SMPS)
- Variable frequency converter

General parameters

Parameter	Symbol	Unit	Value	Remark
Working temperature	T_A	°C	-40 ~ 105	105°C, I(max)=420A
Storage temperature	T_stg	°C	-40 ~ 105	
Limit temperature of primary conductor	T_LP	°C	105	
Mass	m	g	59	STB-xxxLA/ZNR

Absolute parameters

Parameters	Symbol	Unit	Value
Supply voltage	Vcc_max	V	6
Maximum primary current	I_p_max	A	10*I _{pn}
ESD rating (HBM)	U_ESD_HBM	kV	4
High temperature and humidity	T_HAST	-	85°C&85%RH (1000h)

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameters


Parameter	Symbol	Unit	Value	Remark
RMS voltage for AC test 50Hz/1 min	Ud	kV	4	
Impulse withstand voltage 1.2/50μs	Ūw	kV	8	
Clearance distance (pri. -sec)	dCl	mm	12.9	Shortest distance through air
Creepage distance (pri. -sec)	dCp	mm	12.9	Shortest path along device body
Case material			V0	According to UL 94
Comparative tracking index	CTI	V	600	

2. Electrical parameters (STB-250LA/ZNR)

Condition: Vcc = 5.0 V, RL = 10 kΩ, TA = 25°C, unless specified.





Parameters	Symbol	Unit	Min.	Typ.	Max.	Remark
Primary nominal rms current	I _{pn}	A		250		
Primary current, measuring range	I _{pm}	A	-380		380	VCC=4.75V, @85°C
		A	-450		450	VCC=5V, @85°C
Maximum measured peak overcurrent (transformer effect)	I _{p meas}	A	-650		650	di/dt >= 50 A/μs, duration at 650 A is 400 μs
Supply voltage	V _{cc}	V	4.75	5	5.25	
Consumption current	I _c	mA	15 + I _p *NS*1000			NS = 1500
Reference voltage	V _{ref}	V	2.48	2.5	2.52	
Electrical offset voltage @25°C	V _{oe}	mV	-5		5	100 % tested (V _{out} – V _{ref}) @ 0 A
Magnetic offset current	I _{om}	mA	-210		210	@5*I _{pn}
Full-scale voltage	V _{fs}	V		± 0.675		(V _{out} – V _{ref}) @ I _{pn}
Theoretical sensitivity	G _{th}	mV/A		2.7		0.675 V @ I _{pn}
Sensitivity error	G _{err}	% of I _{pn}	-0.8		0.8	
Linearity error within I _{pn}	ξ _L	% of I _{pn}	-0.15		0.15	@25°C
Reaction time @ 10 % of I _p	t _{ra}	μs			1	
Step response time @ 90 % of I _p	t _r	μs			3	
-3 dB band width	BW	kHz	200			
Noise DC ~ 10 kHz DC ~ 100 kHz	V _{noise}	mVpp		0.15 0.25		
Accuracy @ 25°C	X	% of I _{pn}	-1		1	
Accuracy @ 85 °C	X _{TRange}	% of I _{pn}	-1.4		1.4	
Vout Capacitive Load	CL _O	pF	0		100	
Vref Capacitive Load	CL _R	pF	0		100	

Typical application circuits

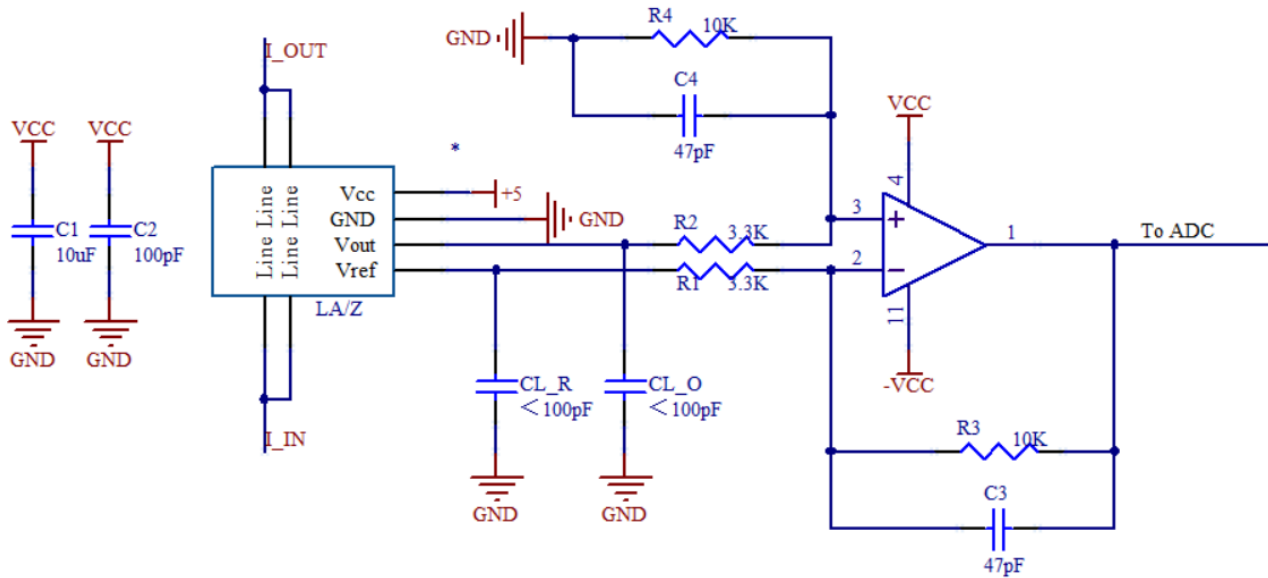


Typical application circuits for STB-LA current sensor. The magnification can be estimated as $M = R4 / R2$ with the condition of $R1 = R2$, and $R3 = R4$. The magnification in the circuit above is around 3. The capacitive load of Vout and Vref should not exceed 100pF to avoid oscillations.

3. Dimensions: STB-xxxLA/ZNR

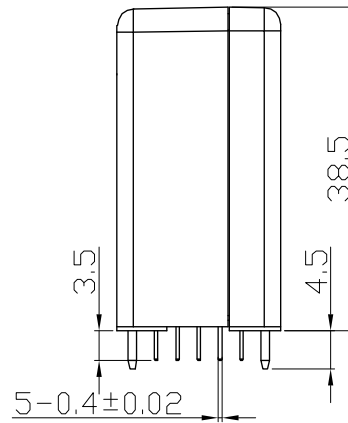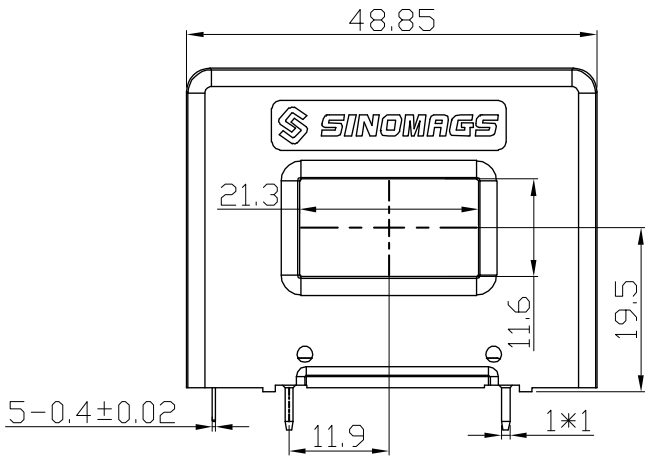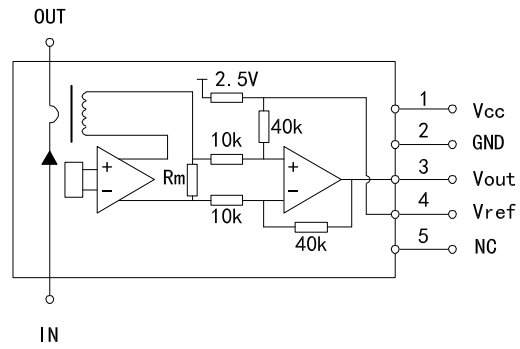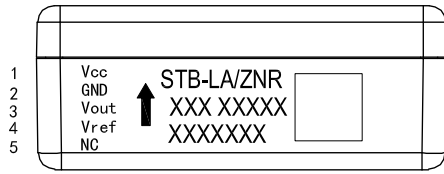


Terminals


1	Vcc
2	GND
3	Vout
4	Vref
5	NC

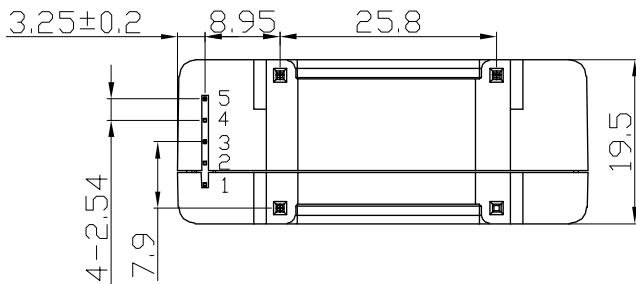

Material : Fit UL94V-0 & RoHS requirements ;
General tolerance : ±0.5
Unit :mm



4. PCB footprint (STB-xxxLA/ZNR)

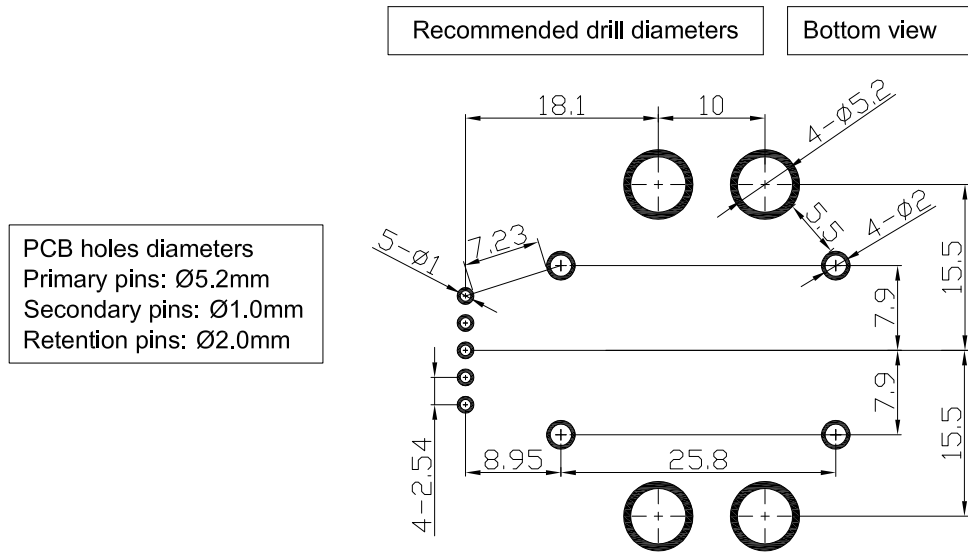

Assembly on PCB

- Recommended PCB hole diameter: 1 mm for secondary pins, 2 mm for retention pin.
- Maximum PCB thickness: 2.4 mm (can be customized per request).
- Wave soldering profile: maximum 260°C for 10 seconds.