


# CURRENT SENSOR

PRODUCT SERIES: STB-LF5  
STB-500LF5  
PRODUCT PART NUMBER: STB-500LF5-A  
STB-500LF5-B  
STB-622LF5-S  
VERSION: Ver 1.6

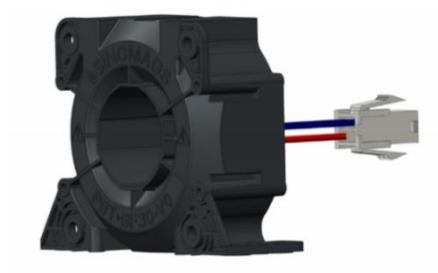

Sinomags Technology Co., Ltd.

Web site: [www.sinomags.com](http://www.sinomags.com)

## CONTENT

1.	Description .....	2
2.	STB-500LF5 Electrical parameters .....	4
3.	STB-500LF5-A Electrical parameters .....	5
4.	STB-500LF5-B Electrical parameters .....	6
5.	STB-622LF5-S Electrical parameters .....	7
6.	STB-500LF5 Dimensions.....	8
7.	STB-500LF5-A Dimensions.....	9
8.	STB-500LF5-B Dimension.....	10
9.	STB-622LF5-S Dimension.....	11
10.	Mechanical characteristics .....	12

## 1. Description

STB-LF5 series current sensors are based on close loop principle. The sensor can detect the current with DC, AC, pulse and irregular wave shape with current output.

### Typical application

- Windmill inverters
- AC variable speed and servo motor drives
- Uninterruptible Power supplies (UPS)
- Power supplies for welding applications
- Test and measurement
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Static converts for DC motor drives

### General parameters

Parameter	Symbol	Unit	Value
Sensor operating temperature	$T_A$	°C	STB-500LF5 : -40 ~ 85 STB-500LF5-A: -40 ~ 85 STB-500LF5-B: -40 ~ 85 STB-622LF5-S: -40 ~ 85
Storage temperature	$T_S$	°C	STB-500LF5 : -50 ~ 90 STB-500LF5-A: -50 ~ 90 STB-500LF5-B: -50 ~ 90 STB-622LF5-S: -50 ~ 90
Mass	m	g	STB-500LF5 : 240 STB-500LF5-A: 240 STB-500LF5-B: 240 STB-622LF5-S: 230

### Absolute parameters

Parameters	Symbol	Unit	Value
Supply voltage (-40°C...85°C)	$V_{CC_{max}}$	V	±25.2
Maximum primary conductor temperature	$T_{B_{max}}$	°C	100
Maximum steady state primary current (-40°C...85°C)	$I_{PN_{max}}$	A	STB-500LF5 : 500 STB-500LF5-A: 500 STB-500LF5-B: 500 STB-622LF5-S: 622

### Ratings

Parameter	Unit	Value
Primary involved potential	V AC/DC	STB-500LF5 : 600 STB-500LF5-A: 600 STB-500LF5-B: 600 STB-622LF5-S: 1700
Maximum surrounding air temperature	°C	85
Primary current	A	STB-500LF5 : 0...500 STB-500LF5-A: 0...500 STB-500LF5-B: 0...500

STB-622LF5-S: 0...622

**Isolation parameters**

Parameter	Symbol	Unit	Value	Remark
RMS voltage for AC test 50Hz/1 min	$U_d$	kV	STB-500LF5 :3.8 STB-500LF5-A:3 STB-500LF5-B:3 STB-622LF5-S:3	
Impulse withstand voltage 1.2/50 $\mu$ s	$U_w$	kV	STB-500LF5 :12.5 STB-500LF5-A:10.6 STB-500LF5-B:10.6 STB-622LF5-S:10.8	
Clearance distance (pri. -sec)	$d_{CI}$	mm	STB-500LF5 :14.6 STB-500LF5-A:12.2 STB-500LF5-B:12.2 STB-622LF5-S:12.25	Shortest distance through air
Creepage distance (pri. -sec)	$d_{CP}$	mm	STB-500LF5 :15.6 STB-500LF5-A:18 STB-500LF5-B:18 STB-622LF5-S:13.3	Shortest path along device body
Case material	-	-	V0	According to UL 94
Comparative tracking index	CTI		STB-500LF5 : 600 STB-500LF5-A: 600 STB-500LF5-B: 600 STB-622LF5-S:175	

## 2. STB-500LF5 Electrical parameters

Condition:  $V_{CC} = \pm 14.25V \sim \pm 25.2V$ ,  $T_A = 25^\circ C$ , unless specified.

Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	$I_{PN}$	A			500	
Primary current measuring range	$I_{PM}$	A	-800		800	
Measuring resistance	$R_M$	$\Omega$			70	@ $\pm 500A$ with $\pm 14.25V$
	$R_M$	$\Omega$			18	@ $\pm 800A$ with $\pm 14.25V$
	$R_M$	$\Omega$			95	@ $\pm 500A$ with $\pm 17.1V$
	$R_M$	$\Omega$			35	@ $\pm 800A$ with $\pm 17.1V$
	$R_M$	$\Omega$			155	@ $\pm 500A$ with $\pm 22.8V$
	$R_M$	$\Omega$			70	@ $\pm 800A$ with $\pm 22.8V$
Secondary nominal RMS current	$I_{SN}$	A	-0.1		0.1	
Turns ratio	$N_S$	NT		5000		
Resistance of secondary winding	$R_S$	$\Omega$			52.8	$T_A = 15^\circ C$
Supply voltage	$V_{CC}$	V	$\pm 14.25$		$\pm 25.2$	
Current consumption	$I_{CC}$	mA		$26 + I_S$ $39 + I_S$		$V_{CC} = \pm 15V$ $V_{CC} = \pm 25.2V$
Nominal sensitivity	$S_N$	mA/A		0.2		
Offset current, referred to primary	$I_O$	A	-1		1	
Offset current temperature drift, referred to primary	$I_{OT}$	A	-0.6		0.6	
Total error at $I_{PN}$	$\varepsilon_{tot}$	% of $I_{PN}$	-0.5		0.5	25...70...85 $^\circ C$
			-0.6		0.6	-40 $^\circ C$ ...85 $^\circ C$
Linearity error	$\varepsilon_L$	% of $I_{PN}$	-0.1		0.1	
RMS noise current referred to pri.	$I_{no}$	mA		90		1Hz to 20kHz
Reaction time @ 10% of $I_{PN}$	$t_{ra}$	$\mu s$			0.5	0 to 500A 200 A/us
Response time @ 90% of $I_{PN}$	$t_r$	$\mu s$			0.5	0 to 500A 200 A/us
Frequency bandwidth (-3dB)	BW	kHz		200		Small Signal bandwidth

### 3. STB-500LF5-A Electrical parameters

Condition:  $V_{CC} = \pm 14.25V \sim \pm 25.2V$ ,  $T_A = 25^\circ C$ , unless specified.

Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	$I_{PN}$	A			500	
Primary current measuring range	$I_{PM}$	A	-800		800	
Measuring resistance	$R_M$	$\Omega$	0		60	@ $\pm 500A$ with $\pm 15V$
	$R_M$	$\Omega$	0		11	@ $\pm 800A$ with $\pm 15V$
	$R_M$	$\Omega$	0		92	@ $\pm 500A$ with $\pm 18V$
	$R_M$	$\Omega$	0		30	@ $\pm 800A$ with $\pm 18V$
	$R_M$	$\Omega$	5		149	@ $\pm 500A$ with $\pm 24V$
	$R_M$	$\Omega$	5		65	@ $\pm 800A$ with $\pm 24V$
Secondary nominal RMS current	$I_{SN}$	A	-0.1		0.1	
Turns ratio	$N_S$	NT		5000		
Resistance of secondary winding	$R_S$	$\Omega$			52.8	$T_A = 25^\circ C$
Supply voltage	$V_{CC}$	V	$\pm 15$		$\pm 24$	$\pm 5\%$
Current consumption	$I_{CC}$	mA		$26 + I_S$ $39 + I_S$		$V_{CC} = \pm 15V$ $V_{CC} = \pm 25.2V$
Nominal sensitivity	$S_N$	mA/A		0.2		
Offset current	$I_O$	mA	-0.4		0.4	$I_P = 0$ $T_A = 25^\circ C$
Offset current temperature drift	$I_{OT}$	A	-0.5	$\pm 0.3$	0.5	$-40^\circ C \dots 85^\circ C$
Total error at $I_{PN}$	$\varepsilon_{tot}$	% of $I_{PN}$	-0.6		0.6	$T_A = 25^\circ C$
Linearity error	$\varepsilon_L$	% of $I_{PN}$	-0.1		0.1	
Reaction time	$t_{ra}$	$\mu s$			1	10% of $I_{PN}$
Response time	$t_r$	$\mu s$			1	90% of $I_{PN}$
di/dt accurately followed	$d_i/d_t$	A/us	100			
Frequency bandwidth (-3dB)	BW	kHz		200		Small Signal bandwidth

#### 4. STB-500LF5-B Electrical parameters

Condition:  $V_{CC} = \pm 14.25V \sim \pm 25.2V$ ,  $T_A = 25^\circ C$ , unless specified.


Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	$I_{PN}$	A			500	
Primary current measuring range	$I_{PM}$	A	-800		800	
Measuring resistance	$R_M$	$\Omega$	0		60	@ $\pm 500A$ with $\pm 15V$
	$R_M$	$\Omega$	0		11	@ $\pm 800A$ with $\pm 15V$
	$R_M$	$\Omega$	0		92	@ $\pm 500A$ with $\pm 18V$
	$R_M$	$\Omega$	0		30	@ $\pm 800A$ with $\pm 18V$
	$R_M$	$\Omega$	5		149	@ $\pm 500A$ with $\pm 24V$
	$R_M$	$\Omega$	5		65	@ $\pm 800A$ with $\pm 24V$
Secondary nominal RMS current	$I_{SN}$	mA	-100		100	
Turns ratio	$N_S$	NT		5000		
Resistance of secondary winding	$R_S$	$\Omega$			52.8	$T_A = 25^\circ C$
Supply voltage	$V_{CC}$	V	$\pm 15$		$\pm 24$	$\pm 5\%$
Current consumption	$I_{CC}$	mA		$26 + I_S$ $39 + I_S$		$V_{CC} = \pm 15V$ $V_{CC} = \pm 25.2V$
Nominal sensitivity	$S_N$	mA/A		0.2		
Offset current	$I_O$	mA	-0.4		0.4	$I_P = 0$ $T_A = 25^\circ C$
Offset current temperature drift	$I_{OT}$	A	-0.5	$\pm 0.3$	0.5	$-40^\circ C \dots 85^\circ C$
Total error at $I_{PN}$	$\varepsilon_{tot}$	% of $I_{PN}$	-0.6		0.6	$T_A = 25^\circ C$
Linearity error	$\varepsilon_L$	% of $I_{PN}$	-0.1		0.1	
Reaction time	$t_{ra}$	$\mu s$			1	10% of $I_{PN}$
Response time	$t_r$	$\mu s$			1	90% of $I_{PN}$
di/dt accurately followed	$d_i/d_t$	A/us	100			
Frequency bandwidth (-3dB)	BW	kHz		200		Small Signal bandwidth

## 5. STB-622LF5-S Electrical parameters






Condition:  $V_{CC} = \pm 24V$ ,  $T_A = 25^\circ C$ , unless specified.

Parameters	Symbol	Unit	Min	Typ	Max	Remark
Primary nominal RMS current	$I_{PN}$	A		622		
Primary current measuring range	$I_{PM}$	A	-1700		1700	
Measuring resistance	$R_M$	$\Omega$	2.5		115	@ $\pm 622A$ with $\pm 24V$
	$R_M$	$\Omega$	2.5		60	@ $\pm 825A$ with $\pm 24V$
	$R_M$	$\Omega$	2.5		5	@ $\pm 1700A$ with $\pm 24V$
Secondary nominal RMS current	$I_{SN}$	mA		155.5		
Turns ratio	$N_s$	NT		4000		
Resistance of secondary winding	$R_s$	$\Omega$			43	@ $T_a = 70^\circ C$
Supply voltage	$V_{CC}$	V		$\pm 24$		
Current consumption	$I_{CC}$	mA		$33 + I_s$		@ $\pm 24V$
Offset current	$I_{LO}$	mA			$\pm 0.4$	$I_p = 0 @ 25^\circ C$
Offset current temperature drift	$I_{LOT}$	A	$\pm 0.3$		$\pm 0.6$	$-40^\circ C \dots 85^\circ C$
Total error at $I_{PN}$	$\xi_{tol}$	% of $I_{PN}$	-0.6		0.6	
Linearity error	$\xi_L$	% of $I_{PN}$	-0.1		0.1	
di/dt accurately followed	di/dt	A/ $\mu s$		100		
Response time @ 90 % of $I_{PN}$	$t_{ra 90}$	$\mu s$			1	
Frequency bandwidth (-1dB)	BW	kHz		100		-3dB, small signal bandwidth


## 6. STB-500LF5 Dimensions

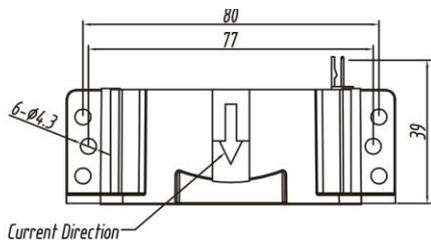


	$d_a$	$d_p$
A-B	14.6mm	15.6mm

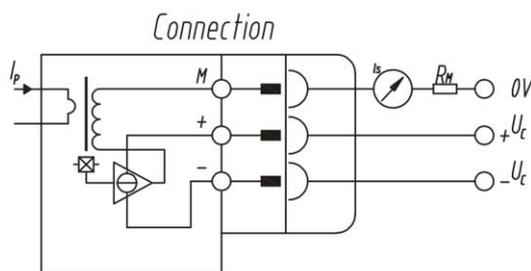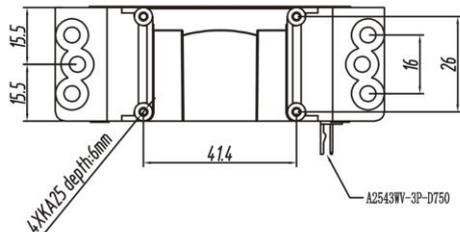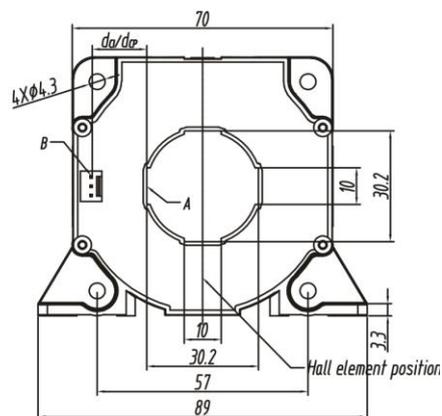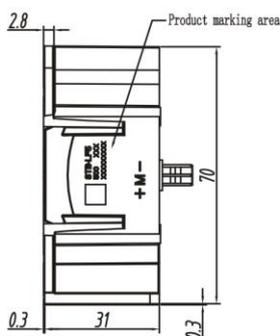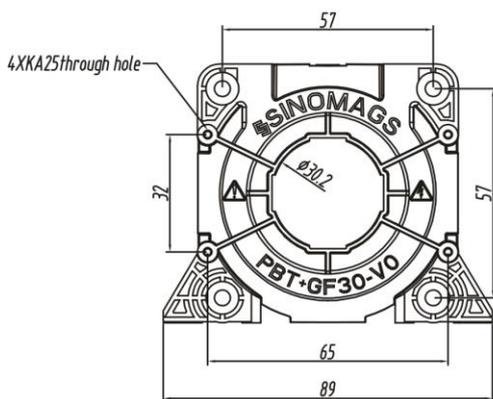


Material : Fit UL94V-0 & RoHS requirements ;  
General tolerance :  $\pm 0.5$   
Unit : mm







## 7. STB-500LF5-A Dimensions

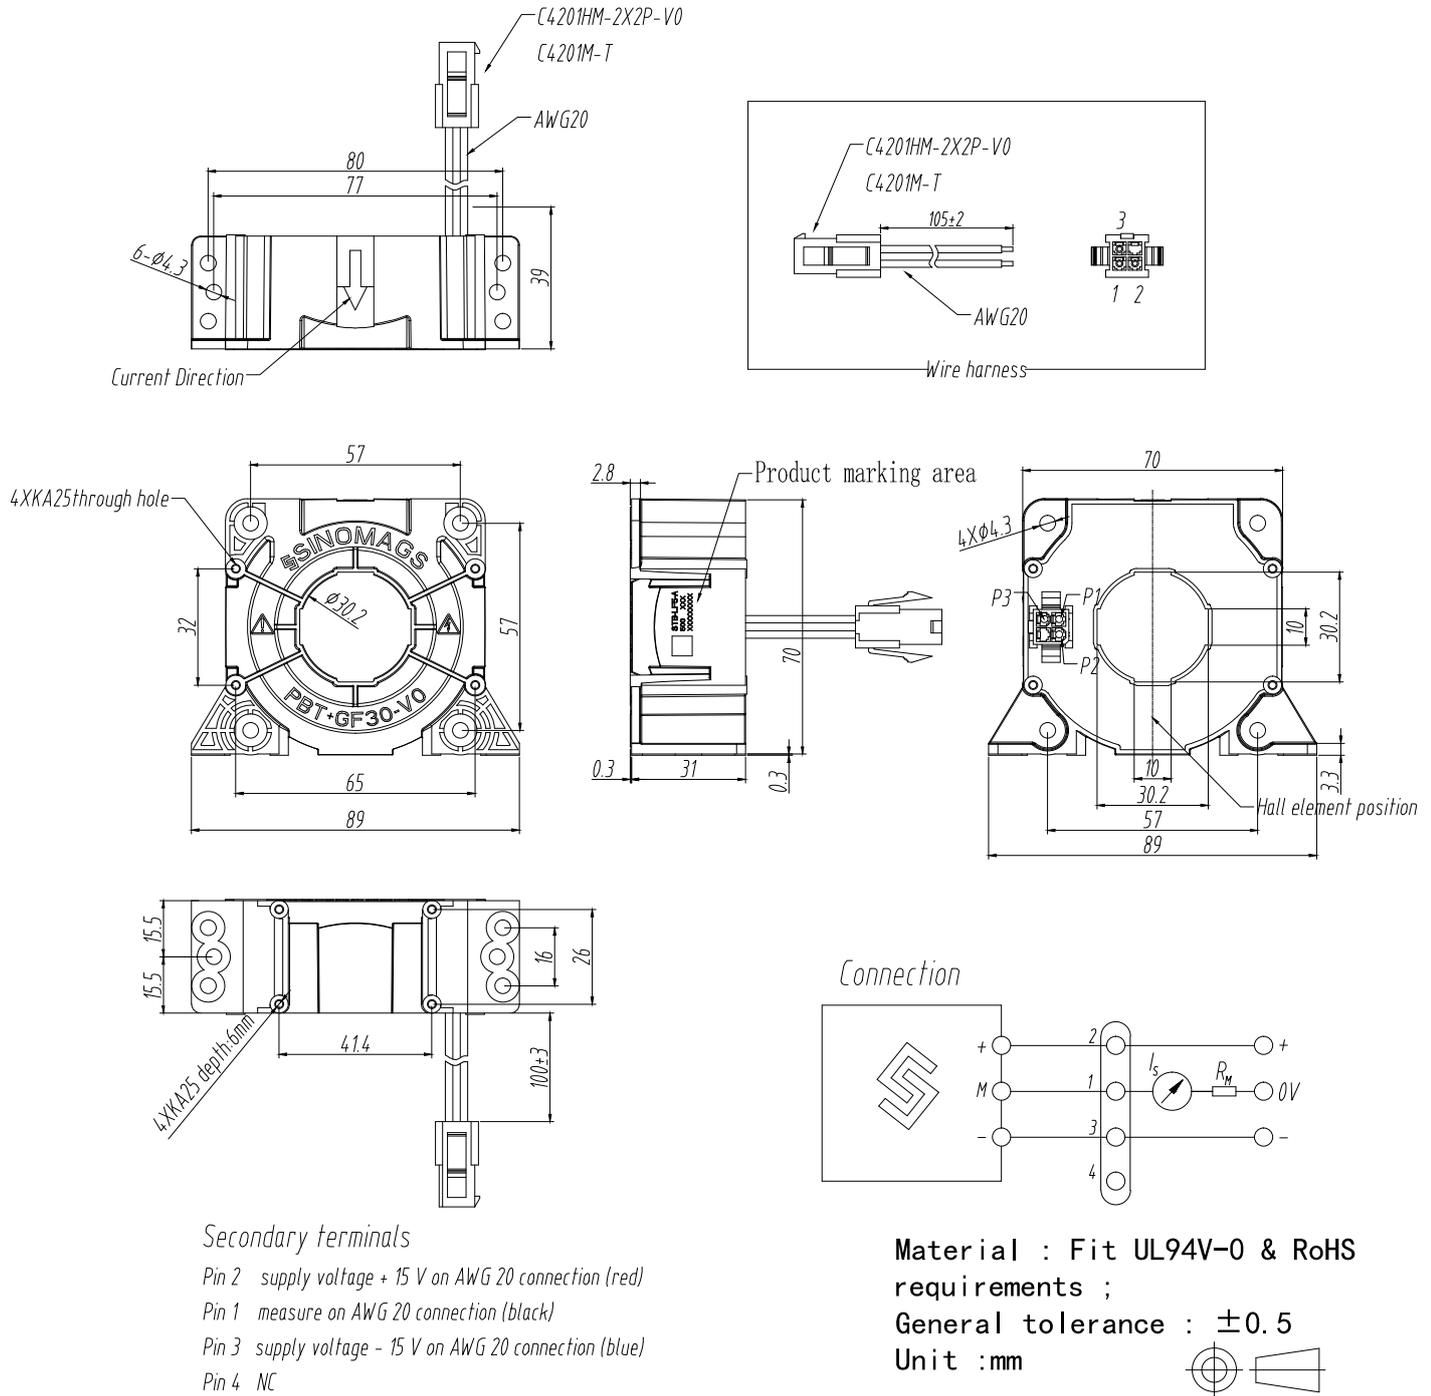


### 8. STB-500LF5-B Dimension

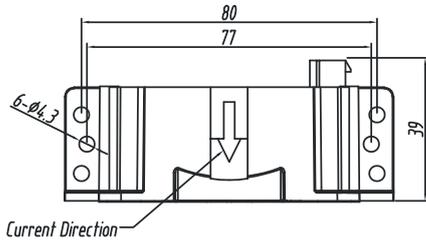


	$d_G$	$d_F$
A-B	8.5 mm	22.2 mm

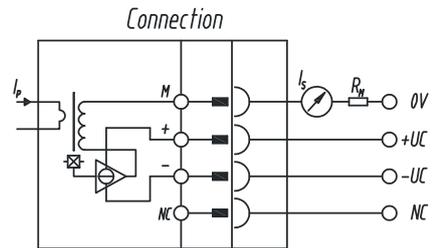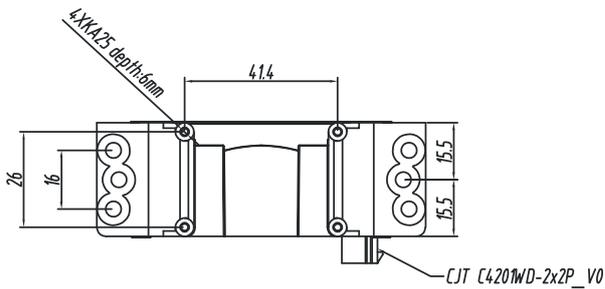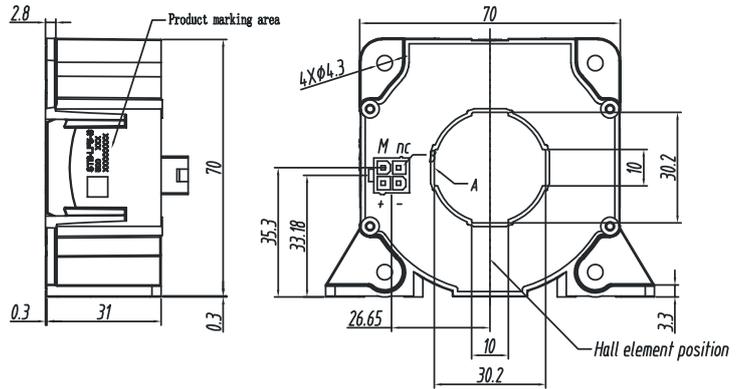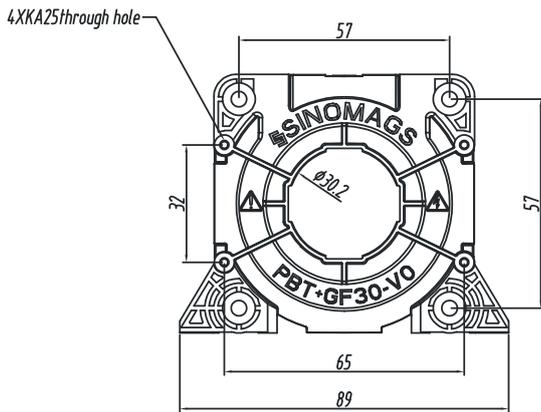

Material : Fit UL94V-0 & RoHS requirements ;  
General tolerance :  $\pm 0.5$   
Unit : mm



### 9. STB-622LF5-S Dimension

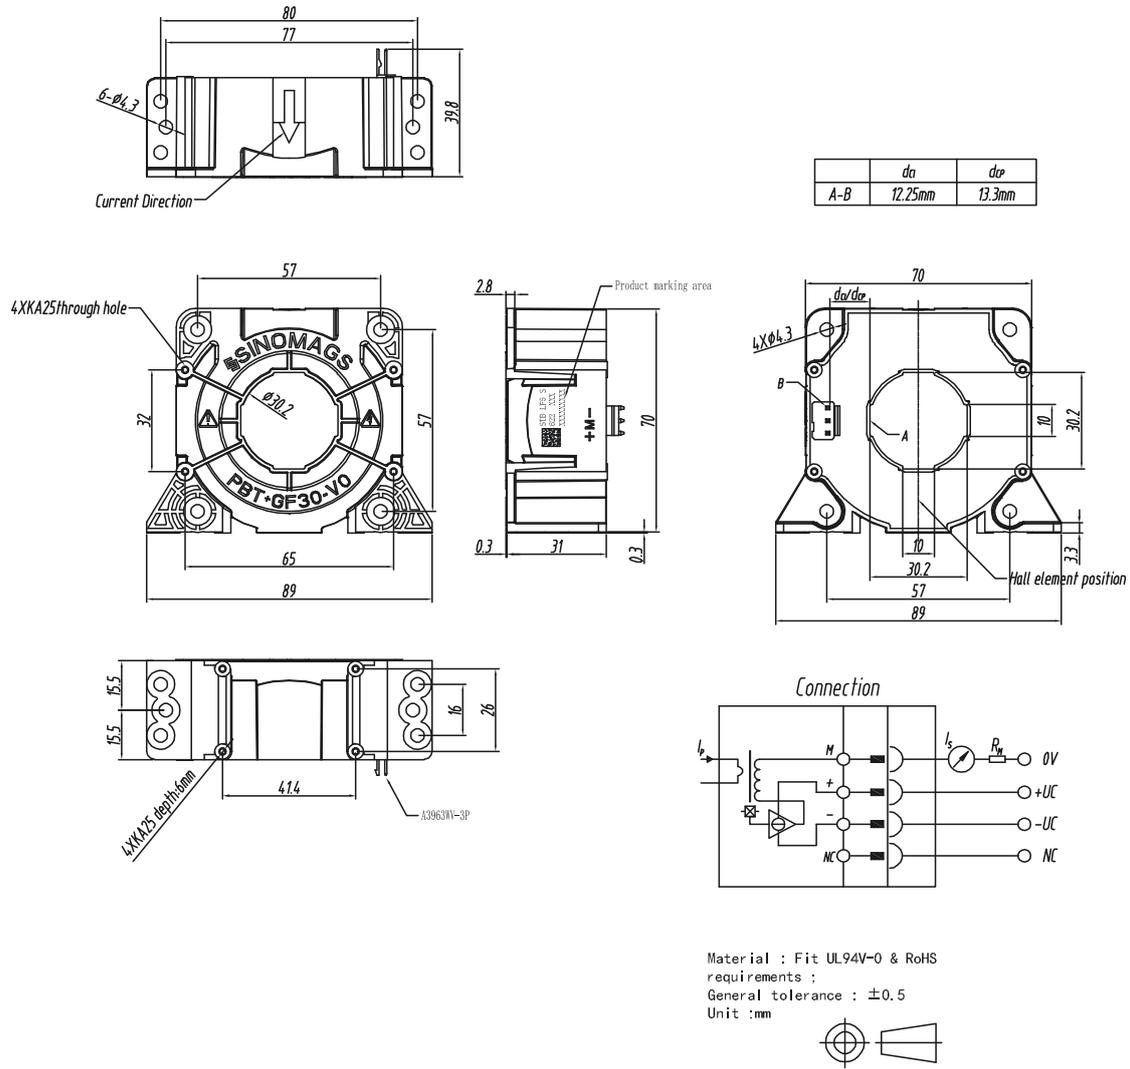

## 10. Mechanical characteristics

- General tolerance  $\pm 0.5$  mm
- Transducer fastening
  - Vertical position
    - 6 holes  $\varnothing 4.3$  mm
    - 6 M4 steel screws
  - Recommended fastening torque 2.1 N·m( $\pm 10\%$ )
- Primary through-hole  $\varnothing 30$ mm
  - Or 30mm  $\times$  10mm
- Transducer fastening
  - Horizontal position
    - 4 holes  $\varnothing 4.3$  mm
    - 4 M4 steel screws
- Connection of secondary
  - CJT A2543WV-3P-D750 (STB-500LF5)
  - CJT C420HM-2X2P-V0、C4201M-T(STB-500LF5-A)
  - CJT C4201WD-2x2P-V0 (STB-500LF5-B)
  - CJT A3963WV-3P (STB-622LF5-S)